

Product Environmental Aspects Declaration



EP and IJ printer (PCR number: AD-04)

No. AD-09-106

Date of publication
Sep./3/2009

brother
at your side

Digital Color Printer HL-3040CN

Specifications:

- Electrophotographic Printer (EP)
- Color
- Printing speed: 16ppm in both color and black
- Original sheet size: A4


<http://www.brother.co.jp/>

For inquiry:
Product Environmental Group
Environmental Management Dept.
Brother Industries, Ltd.
Tel: +81-52-824-2735
FAX: +81-52-824-5667

The following data is calculated by assuming the product prints 153,600 sheets in 5-year usage period.

< Main environmental impact in the product lifecycle >

- | | |
|--|----------|
| ▪ Energy consumption | 12,800MJ |
| ▪ Global warming impact (CO2 equivalent) | 702kg |
| ▪ Acidification impact (SO2 equivalent) | 1.05kg |

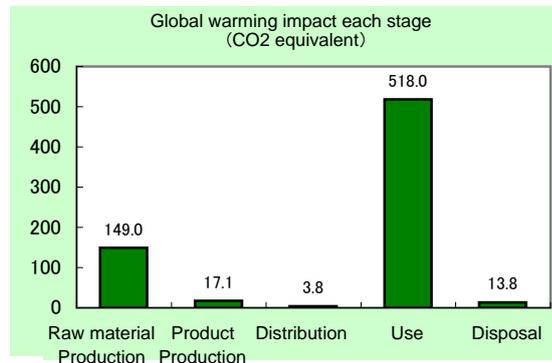

- Electric power consumption in 5 years of "Use stage" is 575kWh.
- The above data does not include the environmental impact of the paper that is used for printing.

Notes:

1. Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
2. Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR: Product Category Rule. Visit EcoLeaf website under JEMAI homepage at http://www.jemai.or.jp/ecoleaf_e/ for details.
3. The units used for EcoLeaf calculations are based on Japanese domestic data. Overseas data has not been applied.

[Supplemental environmental information]

The product assembly and main parts of toner and photoconductor are produced at plants certified with ISO 14001.
The product conforms to the International Energy Star Program and the Law on Promoting Green Purchasing in Japan.
The product has obtained the ECO Mark certification (3R & Energy-Saving Design).

PCR review was conducted by: PCR Deliberation Committee, January 01, 2008, Name of representative: Hisashi Ishitani, KEIO University
Independent verification of the label and data, according to ISO 14025:2006 internal external Third party verifier *: Katsuo Naitou

Program operator: Japan Environmental Management Association for Industry Email: ecoleaf@jemai.or.jp

* In the case of a business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written.

Product Environmental Information Data Sheet



Document control no.	F-02As-02
Product vendor	Brother Industries,LTD.
EcoLeaf registration no.	AD-09-106

Unit Function DB version	v2.1
Characterization Factor DB version	v2.1

PCR name	EP and IJ printer	Product type	HL-3040CN				
PCR code	AD-04	Product weight (kg)	18.7	Package (kg)	3.8	Weight total (kg)	22.5

In/Out items	Life Cycle Stage	Unit	Production		Distribution	Use	Disposal	Total		
			Raw material	Product						
Energy Consumption										
		MJ	2.70E+03	2.91E+02	5.04E+01	9.78E+03	1.70E+01	1.28E+04		
		Mcal	6.44E+02	6.95E+01	1.20E+01	2.34E+03	4.06E+00	3.07E+03		
Inventory analyses	Impact by Resource Consumption	Energy resources	Coal	kg	1.62E+01	1.58E+00	1.18E-04	5.52E+01	9.84E-02	7.31E+01
		Exhaustible resources	Crude oil (for fuel)	kg	2.73E+01	3.01E+00	1.10E+00	8.05E+01	1.88E-01	1.12E+02
			LNG	kg	6.05E+00	8.10E-01	1.70E-02	2.28E+01	5.08E-02	2.97E+01
		Mineral resources	Uranium content of an ore	kg	5.87E-04	1.07E-04	7.98E-09	2.71E-03	6.65E-06	3.41E-03
			Crude oil (for material)	kg	9.11E+00	0	0	1.80E+01	0	2.72E+01
			Iron content of an ore	kg	7.32E+00	0	0	1.40E+01	0	2.13E+01
			Cu content of an ore	kg	4.28E-01	0	0	1.15E-02	0	4.40E-01
			Al content of an ore	kg	7.69E-01	0	0	1.52E+00	0	2.29E+00
			Ni content of an ore	kg	1.86E-02	0	0	4.53E-02	0	6.39E-02
			Cr content of an ore	kg	2.74E-02	0	0	6.62E-02	0	9.35E-02
	Mn content of an ore		kg	3.61E-02	0	0	8.13E-02	0	1.17E-01	
	Pb content of an ore		kg	1.87E-02	0	0	9.31E-04	0	1.97E-02	
	Sn content of an ore		kg	-	-	-	-	-	-	
	Zn content of an ore	kg	1.84E-01	0	0	9.15E-03	0	1.94E-01		
	Au content of an ore	kg	-	-	-	-	-	-		
	Ag content of an ore	kg	-	-	-	-	-	-		
	Silica Sand	kg	5.22E-01	0	0	1.67E-01	0	6.89E-01		
	Halite	kg	5.03E+00	4.08E-04	0	8.90E+00	8.77E-03	1.39E+01		
	Limestone	kg	1.84E+00	2.65E-02	0	3.58E+00	1.27E-01	5.58E+00		
	Natural soda ash	kg	4.24E-02	0	0	0	0	4.24E-02		
Renewable resources	Wood	kg	6.64E+00	8.69E-01	0	4.83E+01	0	5.58E+01		
Water	kg	1.54E+04	1.25E+03	8.90E-02	3.84E+04	8.27E+01	5.51E+04			
Impact by Emission/Discharge to the environment	to Atmosphere	CO2	kg	1.45E+02	1.69E+01	3.58E+00	5.12E+02	1.38E+01	6.92E+02	
		SOx	kg	1.10E-01	1.13E-02	2.11E-03	3.70E-01	7.30E-03	5.01E-01	
		NOx	kg	1.87E-01	1.73E-02	1.59E-02	5.53E-01	1.62E-02	7.89E-01	
		N2O	kg	1.27E-02	8.53E-04	6.16E-04	2.18E-02	2.40E-05	3.59E-02	
		CH4	kg	1.56E-03	2.86E-04	2.13E-08	7.21E-03	1.78E-05	9.07E-03	
		CO	kg	2.16E-02	2.31E-03	3.92E-03	9.27E-02	3.12E-03	1.24E-01	
		NMVOG	kg	3.05E-03	5.60E-04	4.18E-08	1.41E-02	3.49E-05	1.78E-02	
		CxHy	kg	5.87E-03	3.97E-04	4.93E-04	1.05E-02	7.01E-05	1.73E-02	
		Dust	kg	1.93E-02	1.35E-03	1.54E-03	4.24E-02	9.38E-04	6.55E-02	
		BOD	kg	-	-	-	-	-	-	
	COD	kg	-	-	-	-	-	-		
	N total	kg	-	-	-	-	-	-		
	P total	kg	-	-	-	-	-	-		
	SS	kg	-	-	-	-	-	-		
	to Water domain	Unspecified Solid Waste	kg	1.22E+00	1.09E-02	0	2.54E+01	1.10E+01	3.76E+01	
to Soil system	Slag	kg	2.51E+00	0	0	4.28E+00	0	6.79E+00		
	Sludge	kg	1.46E+00	0	0	3.26E+00	0	4.72E+00		
	Low level radio-active waste	kg	4.11E-04	7.47E-05	5.58E-09	1.89E-03	4.64E-06	2.38E-03		
Impact assessment	by Resource Consumption	Exhaustible resources	Energy resources (crude oil equivalent)	kg	4.98E+01	5.88E+00	1.12E+00	1.66E+02	3.67E-01	2.23E+02
	by Emission/Discharge to the environment	to Atmosphere	Mineral resources (Iron ore equivalent)	kg	1.21E+02	0	0	6.84E+01	0	1.90E+02
			Global Warming (CO2 equivalent)	kg	1.49E+02	1.71E+01	3.75E+00	5.18E+02	1.38E+01	7.02E+02
		to Water system	Acidification (SO2 equivalent)	kg	2.41E-01	2.34E-02	1.32E-02	7.57E-01	1.86E-02	1.05E+00

[Notes for readers: EcoLeaf common rules]

I. Stage related

- A. "Production" stage is intended for two sub-stages listed below.
 (1) "Raw material" production: consists of mining, transportation and raw material production.
 (2) "Product" production: consists of the parts processing, assembly and installation.
 B. "Distribution" stage is intended for transportation of produced product. Transportation of consumables and maintenance goods (e.g., replacement parts) for use of the product are included into "Use" stage.
 C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal of consumables/maintenance goods (e.g., replacement parts).
 D. "Disposal" stage is intended for environmental impacts by product disposal.

II. Inventory analyses

- A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g., iron, aluminum) in the ore.
 B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.
 C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III. Impact analyses

- Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO2 in case of "Global Warming").
 A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.
 B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, Water and Soil system.

IV. Data entry format

- A. Exponential notation, after the decimal point to two, should be used.
 B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.
 C. Indicate "-" if calculation nor estimation can not be done, in order to differentiate to indicate "zero".
 D. Row total of the data is automatically calculated, excluding a row includes "-" item. Row total of such is presented as a blank (no data).
 (BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

[Notes for readers: Target product specific]

- Product weight includes the accessories as standard equipment, a toner cartridge and a drum unit. Packaging weight includes packaging material and appended goods (e.g., user's manual, other printed matter, polyethylene bags).
- Production stage includes the production/distribution impact of the parts making up a machine and the initial set of a toner cartridge and a photo conductor, as well as the impact of product assembly.
- Distribution stage's impact is calculated according to the PCR. The transportation distance of a product from an overseas factory to the port of Japan is based on actual distance. The transportation distance in Japan uses 100 km as average distance.
- Use stage's impact is calculated according to the PCR. It includes the impact of printing 153600 sheets, calculated by supposing a user use a machine for 5 years.
 It also includes the electricity consumption of a machine calculated based on 5-year use, supposing a month consists of 4 weeks, with weekly electricity consumption calculated by the TEC test procedure.
 The production, distribution, and disposal/recycle impact of the consumables used in those 5 years is also included.
 The distribution impact of consumables is calculated under the same condition of products:
 The transportation distance of consumables from an overseas factory to the port of Japan is based on actual distance. The transportation distance in Japan uses 100 km as average distance.
 Since we have not collected consumables as a producer in Japan, which are newly introduced, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.
 This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of consumables.
- Disposal stage: Since we have not collected machines as a producer in Japan, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.
 This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of machines.

Product data

(Input data and parameters for



Document control no.	F-03s-02
Product vendor	Brother Industries, LTD.
EcoLEaf registration no.	AD-09-106

PCR name	EP and IJ printer(PCR ID:AD-04)	Product type	HL-3040CN				
LCA/LCIA in units of:	1	Product weight (kg)	18.7	Package (kg)	3.8	weight total (kg)	22.5

1. Product information (per unit): parts etc. by material and by process/assembly method

Product	Breakdown of primary materials				Math breakdown of parts, which need to apply Processing / Assembly base Units (Parts B.C)			
	Material name	Weight (kg)	Material name	Weight (kg)	Process name	Weight (kg)	Process name	Weight (kg)
	Steel	5.98E+00	Paper	3.11E+00	Press molding: Iron (kg)	6.10E+00	Parts assembly (kg)	4.50E+00
Stainless steel	1.17E-01	Semiconductor substrate	1.66E+00	Press molding: Nonferrous metal (kg)	4.72E-01			
Aluminum	6.45E-01	Wood	0.00E+00	injection molding (kg)	9.75E+00			
Other metal	7.10E-03	Medium-sized motor	9.96E-01	Glass molding (kg)	1.54E-02			
Thermoplastic resin	9.32E+00	Batteries	0.00E+00					
Thermosetting resin	3.64E-04	Lubricants	4.97E-03					
Rubber	6.57E-01	Clean water	0.00E+00					
Glass	1.54E-02							
Subtotal	1.67E+01	Subtotal	5.77E+00					
Total		Subtotal	2.25E+01	Subtotal	1.63E+01	Subtotal	4.50E+00	

Note

2. Production site information (per unit): Consumption and discharge/emission for production/processing/assembly within the site.SOx and NOx should be indicated in SO₂, NO₂ equivalent.

Consumption	Classifier	Material	Energy	Energy	Energy	Energy	Energy	Energy	
	Distribution	Corrugated cardboard (kg)	Electricity (kwh)	Diesel truck: 20 ton (kg.km)	Gasoline as fuel (kg)	Freight by ship (kg.km)	Kerosene as fuel (kg)	Heavy oil fuel (kg)	Diesel truck: 10 ton (kg.km)
	Quantity	4.08E-01	9.09E+00	1.11E+02	2.74E-04	4.64E+02	3.26E-05	1.01E+00	1.98E+02
	Note								
Emission / Discharge	Classifier	Energy							
	Distribution	Incineration: Industrial waste (kg)							
	Quantity	4.08E-01							
	Note								

Note

3. Distribution stage information (per unit): means, distance, loading ratio, consumptions and emissions/discharges.

Distribution	means of transportation	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)						
	Conditions	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)
	Quantity	2.25E+01	3.00E+01	3.59E+01	1.88E+03	2.25E+01	2.54E+03	1.00E+02	5.71E+04
	Note								
means of transportation	Diesel truck: 10 ton (kg.km)								
Conditions	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)					
Quantity	2.25E+01	1.00E+02	3.58E+01	6.28E+03					
Note									

Note

4. Use stage (per unit): use condition (mode, term) including active mode, standby mode and maintenance.**4.1 Product and accessories subject to this analysis**

Product	Classifier	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	
	Distribution	Electricity (kwh)	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)	Diesel truck: 10 ton (kg.km)	Cold-Rolled steel plate (kg)	Electroplated steel Plate (kg)	Stainless steel plate (kg)	Copper plate (kg)
	Quantity	5.75E+02	7.56E+03	1.48E+05	2.52E+04	4.80E-04	1.34E+01	2.85E-01	3.80E-02
	Note	Electricity consumption for 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years				
Classifier	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	
Distribution	Aluminum plate (kg)	Low density polyethylene (kg)	PP (kg)	PS (kg)	Polycarbonate (kg)	PC-ABS(70/30) (kg)	POM(polyacetal) (kg)	PET (kg)	
Quantity	1.44E+00	2.11E-01	1.57E+00	2.50E-02	5.30E-02	7.89E+00	1.04E+00	1.37E+00	
Note									
Classifier	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	
Distribution	ABS (kg)	Expandable soft polyurethane (for automobile) (kg)	Nitrile-butadiene rubber (NBR) (kg)	AS resin (kg)	Corrugated cardboard (kg)	Cardboard (kg)	Paper (Western style)	Press molding: Iron (kg)	
Quantity	1.42E+00	4.50E-01	2.62E+00	4.14E+00	1.26E+01	6.62E+00	2.70E+00	1.37E+01	
Note									
Classifier	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	
Distribution	Press molding: Nonferrous metal	injection molding (kg)	Parts assembly (kg)	Gasoline as fuel (kg)	Kerosene as fuel (kg)	Heavy oil fuel (kg)	Diesel oil as fuel (kg)	Electricity (kwh)	
Quantity	1.48E+00	1.98E+01	3.35E+00	9.87E-04	1.19E-04	4.31E+00	2.62E-01	3.69E+01	
Note				Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	
Classifier									
Distribution									
Quantity									
Note									

Note At "Use Stage", the product electricity consumption in 5 years usage period is 574.56 kWh .

4.2 Disposal/Recycle information on consumables and replacement parts

Consumables	Classifier	Consumption	Process	Process	Process
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill	Landfill: General waste (kg)
	Quantity	3.30E+03	3.33E+01	4.07E+01	1.63E+01
	Note	Consumables not collected			

Note

5. Disposal/Recycle stage information (per product): process method and scenarios

Scenario	Classifier	Consumption	Process	Process	Process
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill	Landfill: General waste (kg)
	Quantity	1.88E+03	1.56E+01	1.00E+01	9.42E+00
	Note	Machines not collected			

Note

6. Others